

Designing Integrated FET Regulators Using iSim v3

Description

Intersil's iSim is a simple, highly interactive and dynamic web-based tool for selecting and simulating devices from Intersil's broad portfolio. iSim v3, the new version of iSim, takes this one step further to include new advanced capabilities for selecting, simulating and optimizing current and voltage mode controllers with integrated FETs.

Using iSim v3 is as simple as:

1. Enter design goals such as input and output specifications, as well as additional features such as SYNCH capability, Power-On Reset, Digital Control, etc.
2. Select part from among recommended devices.
3. Perform a quick AC/Transient Analysis online. Tweak compensation components and see closed-loop response change on the fly.

iSim v3 also enables the designer to look at efficiency graphs and power loss distribution across components. In addition, it provides the user actual vendor part numbers which makes creating the Bill of Materials easy and ready to order.

This Application Note describes the newly added features in iSim v3 and how they can reduce design effort and accelerate time-to-market. It takes the reader through the flexible and highly intuitive user interface which is designed to make the tool ready-to-use and multiply productivity.

Accessing iSim v3

The iSim v3 tool can be accessed from the Intersil homepage under the "Design Resources and Tools" section, as shown in Figure 1. Currently, this version of the tool is being offered only for Integrated FET products.

Power Management
Switching Regulation
Integrated FET - UPDATED

Power Management
Switching Regulation
Integrated FET - **UPDATED**
Power Modules - **NEW**
Multi-Phase
Isolated DC/DC
Linear Regulators
MOSFET Drivers
Power Supply Support
Hot Swap Controllers
Sequencers
Battery Management

Operational Amplifiers
Active Filter Designer - **NEW**
Inverting Gain
Non-Inverting Gain
Transimpedance
Differential Amplifier
Instrumentation Amplifier
Single Stage Low Pass Filter
Single Stage High Pass Filter

After using iSim to design your schematic you can download the offline iSim:PE version of the schematic so that you can capture schematics, view waveforms, perform application analysis and more!
Download iSim:PE

iSim is a Trademark of Intersil Americas Inc.

Intersil's iSim™ is an interactive, web-based tool for selecting and simulating devices from Intersil's broad portfolio. Based on input and output specifications provided by the user, iSim will find all suitable Intersil devices for your application. In many cases, a simulation is also made available for immediate feedback on circuit performance. Currently, iSim is available for Intersil's power management devices and operational amplifiers.

INFORMATION GENERATED BY THIS SOFTWARE IS PROVIDED 'AS-IS.' INTERSIL DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, FOR ALL INFORMATION GENERATED BY THIS SOFTWARE. **INTERISIL EXPRESSLY DISCLAIMS IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY.** RECOMMENDED COMPONENT VALUES ARE SOLELY SUGGESTED TO ASSIST SOFTWARE USERS. USE OF COMPONENT VALUES THAT ARE OUTSIDE OF THE RECOMMENDED RANGES IS UNDESIRABLE. INTERSIL SHALL HAVE NO LIABILITY HEREUNDER RESULTING FROM YOUR USE OF THE SOFTWARE. BY USING THE SOFTWARE YOU ACCEPT THESE TERMS.

Power Management
Intersil's iSim simulator for power is an applications-based Intersil Power Management Solution Selector with dynamic input fields to match your input and output requirements. All applicable Intersil devices will be listed and those with a design button are available for online simulation. When available for simulation, a reference schematic will be generated for simulation, based on your specifications.

Operational Amplifiers
Intersil's iSim simulator for Operational Amplifiers provides application oriented solution tools using the broad range of Intersil precision and high speed amplifiers. Tools include an Active Filter Designer, Inverting gain configuration, Non-inverting gain configuration, Transimpedance, Differential Amplifier, Instrumentation Amplifier, Single Stage Low Pass Filter, and Single Stage High Pass Filter. Each tool includes Intersil devices suited to that application along with simulation models in most cases. Taking designer inputs, each tool will help you pick the best Intersil amplifier and deliver designs to hit the desired performance targets.

iSim will filter out only the inputs required for the application group you are interested in. Please select an application from the links on the left to get started.

See AN1243 - Getting Started with iSim and iSim:PE

FIGURE 1. HOW TO REACH iSIM v3

iSim v3 Design Flow Overview

Figure 2 shows the design flow for the iSim v3 simulation tool with user inputs and responses from the tool.

The tool simplifies and accelerates the entire custom design by taking the user through a robust step-by-step process of selecting discrete parts by providing recommendations based on the user's design goals.

iSim v3 has been designed for use with Intersil current

and voltage mode controllers with Integrated FETs. The tool design flow has four main steps:

1. Requirement Specification
2. Advanced Design Section
3. Analysis and Optimization
4. Design Reports Generation

The "Requirement Specification" on page 3 describes these steps in detail.

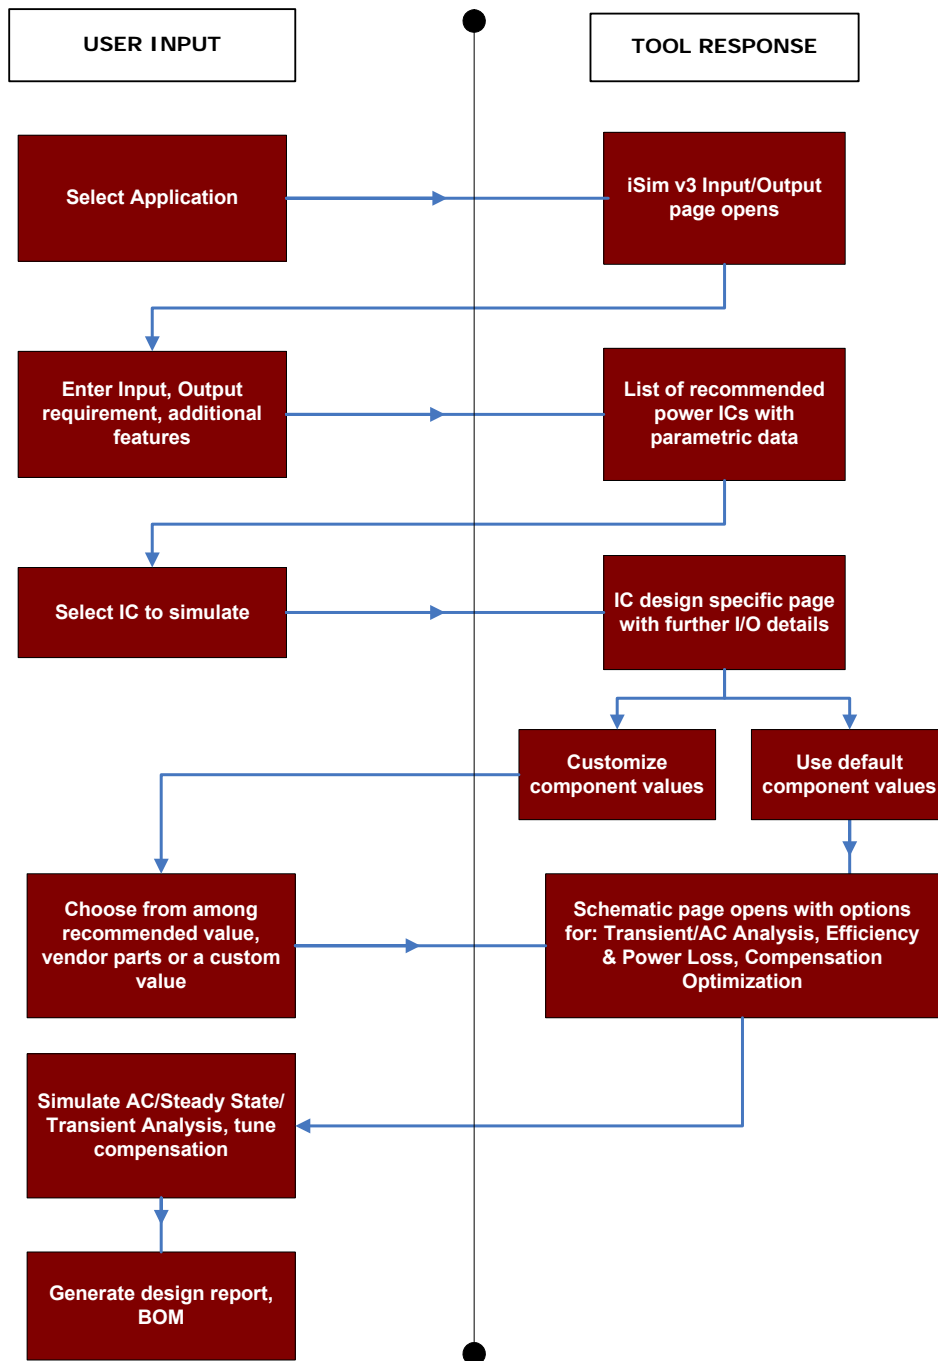


FIGURE 2. iSim v3 DESIGN FLOW

Requirement Specification

The user may enter Input and Output requirements for their design, as well as additional features they may require, such as SYNCH capability, Power-On-Reset, Digital Control, etc. The tool also provides the flexibility to enter requirements for multiple output voltages and the option to select between switching power supplies or LDOs.

Clicking the **Search** button, as shown in Figure 3, lists all Intersil Integrated FET parts that satisfy the user requirements, as well as useful parametric information.

The user may select parts from the **Device** column for further analysis and simulation. iSim models are available for those parts that are highlighted with a hyperlink. Links to the datasheet are available for all parts in the list.

FIGURE 3. INPUT/OUTPUT REQUIREMENTS SPECIFICATION

Device	Info	Description	VIN (V)		VOUT (V)		IOUT (A)	Control Type	Switching Frequency (MHz)	Peak Efficiency (%)	BOM Footprint	Package(s)
			min	max	min	max	max					
ISL85001	DS	1A Standard Buck PWM Regulator	5.5	25	0.6	1.9	1	Voltage Mode	0.5	94	*	12 Ld QFN
ISL8510	DS	Dual Output Controller with 1A Standard Buck PWM and LDO	5	25	0.6	2.2	1	Voltage Mode	1	95	*	24 Ld QFN
ISL8501	DS	Triple Output Controller with 1A Standard Buck PWM and Dual LDOs	5	25	0.6	2.2	1		0.5	95	*	24 Ld QFN
ISL8500	DS	2A Standard Buck PWM Regulator	5.5	25	0.6	1.9	2	Voltage Mode	0.5	94	*	12 Ld QFN
ISL8502	DS	2A Synchronous Buck Regulator with Integrated MOSFETs	4.5	14	0.6	1.4	2	Voltage Mode		95	*	24 Ld QFN
ISL8540	DS	DC/DC Power Switching Regulator	9	40	1.21	3.5	2	Voltage Mode		95	*	20 Ld HTSSOP
ISL8560	DS	DC/DC Power Switching Regulator	9	60	1.21	5.5	2	Voltage Mode		95	*	20 Ld EPTSSOP, 20 Ld QFN
ZL2105	DS	3A Integrated Digital DC-DC Converter	4.5	14	0.54	5.5	3	Digital		92	*	36 Ld QFN
ZL2106	DS	6A Digital-DC Synchronous Step-Down DC-DC Converter	4.5	14	0.54	5.5	6	Digital		87	*	36 Ld QFN

FIGURE 4. PARAMETRIC SEARCH RESULTS

Advanced Design Section

The **Custom Design** button brings up the advanced design section shown in Figure 5. The user can enter detailed design specifications and choose the circuit component based on the recommended value. The user can determine the output inductor, output capacitor, input capacitor or diode based on different parts. Enter

design requirements such as inductor ripple and switching frequency and then choose from recommended values, vendor parts and user's own value. The recommended values are calculated based on the user's input requirements.

ISL8502 - 2A Synchronous Buck Regulator with Integrated MOSFETs

Input Requirements		Output Requirements	
Vin, Min:	9 V	Vout, Nom:	3.3 V
Vin, Nom:	10 V	Current:	600m A
Vin, Max:	11 V		

Custom Design

Note: RECOMMENDED COMPONENT VALUES ARE SOLELY SUGGESTED TO ASSIST SOFTWARE USERS. USE OF COMPONENT VALUES THAT ARE OUTSIDE OF THE RECOMMENDED RANGES IS UNDESIRABLE.

Output Inductance
 Output Capacitance
 Ceramic Input Cap
 Bulk Input Cap

Lr ²	30 %	Voltage Ripple	33.00m V	Voltage Ripple	20.00m V	Voltage Ripple	40.00m V
Fsw	500k Hz	Max Deviation	165.0m V			Power Dissipation	19.80m W
		Max Load Step	150.0m A				
		Slew Rate	1 A/us				

Select an Inductor	Select a Capacitor	Select a Capacitor	Select a Capacitor
<input checked="" type="radio"/> Use Recommended Inductance 24.57uH I _{Peak} 690.0mA	<input checked="" type="radio"/> Use Recommended Capacitance 10.48uF ESR 183.3mΩ	<input checked="" type="radio"/> Use Recommended Capacitance 14.74uF	<input checked="" type="radio"/> Use Recommended Capacitance 1.621uF ESR 1.364mΩ RMS Current 282.1mA
<input type="radio"/> Use Vendor Part	<input type="radio"/> Use Vendor Part	<input type="radio"/> Use Vendor Part	<input type="radio"/> Use Vendor Part <input type="button" value="Part Lookup"/>
<input type="radio"/> Use Your Own Inductance <input type="text" value="24.57u"/> H I _{Peak} 690.0mA	<input type="radio"/> Use Your Own Capacitance <input type="text" value="10.48u"/> F ESR <input type="text" value="183.3m"/> Ω	<input type="radio"/> Use Your Own Capacitance <input type="text" value="14.74u"/> F	<input type="radio"/> Use Your Own Capacitance <input type="text" value="1.621u"/> F ESR <input type="text" value="1.364m"/> Ω RMS Current <input type="text" value="282.1m"/> Ω

Design

FIGURE 5. ADVANCED DESIGN SECTION

Vendor part selection is for users to look up parts from a vendor database (DigiKey in this case). The part lookup icon brings up the vendor part selection interface shown in Figure 6. The recommended values are shown on the top as reference. User can specify the limitations of the component values by tweaking the scroll bar or clicking the pencil icon on the left and entering the desired limits manually. User can also choose the manufacturer and tolerance. Click "APPLY FILTERS" and only the parts within the range will be shown in the list below. The applied limitations will be displayed (see Figure 6) by clicking "View Applied". User can also reset the limitations to default settings by clicking "Reset" or clear all limitations by clicking "Clear All".

Once the user selects the component, click "►" icon next to the DigiKey part number and the browser will be directed back to the set-up page. The part number and component parameters will be displayed under the **Part Lookup** icon, as shown in Figure 7.

The component value can be entered in "Use Your Own" section when the user already has the component. Once the component has been selected, click **Continue** and the user will be directed to next stage. After completing the setup, click **Design** and the tool will generate the design schematic.

Values used in part lookup:
RefDes: LOUT
Ind: 24.57uH
IRating: 690.0mA

Select Component Filters

Inductance (H): 54.3uH, 8.34uH

DCR (Ohm): 40.80hm, 430uOhm

Current (A): 41.5A, 621mA

Manufacturer: AVX Corporation (167), TDK Corporation (44), Würth Electronics Inc (84)

Tolerance: 0.05mH (6), 0.1nH (51), 0.2nH (81), 0.3nH (178), 0.5nH (48), 10% (9)

APPLY FILTERS Filters: View Applied | Reset | Clear All

Select Digikey Part Number	Part Number	Manufacturer	Description	Inductance	Current	DCR	Packaging
445-1678-ND	PCA145/6ER-U03S002	TDK Corporation	INDUCTOR/XFRMR 21.6UH MULTIWI	2.16E-05	1	0.1103	Bulk
445-1688-ND	PCA15EFD-U03S003	TDK Corporation	INDUCTOR/XFRMR 23.3UH MULTIWI	2.33E-05	1.07	0.07767	Bulk
445-1698-ND	PCA20EFD-U03S003	TDK Corporation	INDUCTOR/XFRMR 22.3UH MULTIWI	2.23E-05	1.6	0.0475	Bulk
445-1981-1-ND	SLF10145T-220M1R9-PF	TDK Corporation	INDUCTOR SHIELD PWR 22UH 10145	2.2E-05	1.9	0.0591	Cut Tape (CT)
445-1981-2-ND	SLF10145T-220M1R9-PF	TDK Corporation	INDUCTOR SHIELD PWR 22UH 10145	2.2E-05	1.9	0.0591	Tape & Reel (TR)
445-1992-1-ND	SLF6028T-220MR77-PF	TDK Corporation	INDUCTOR SHIELD PWR 22UH 6028	2.2E-05	0.77	0.104	Cut Tape (CT)
445-1992-2-ND	SLF6028T-220MR77-PF	TDK Corporation	INDUCTOR SHIELD PWR 22UH 6028	2.2E-05	0.77	0.104	Tape & Reel (TR)
445-2003-1-ND	SLF7032T-220MR96-2-PF	TDK Corporation	INDUCTOR SHIELD PWR 22UH 7032	2.2E-05	0.96	0.11	Cut Tape (CT)
445-2003-2-ND	SLF7032T-220MR96-2-PF	TDK Corporation	INDUCTOR SHIELD PWR 22UH 7032	2.2E-05	0.96	0.11	Tape & Reel (TR)
445-2019-1-ND	SLF7045T-220MR90-PF	TDK Corporation	INDUCTOR SHIELD PWR 22UH 7045	2.2E-05	0.9	0.061	Cut Tape (CT)
445-2019-2-ND	SLF7045T-220MR90-PF	TDK Corporation	INDUCTOR SHIELD PWR 22UH 7045	2.2E-05	0.9	0.061	Tape & Reel (TR)

FIGURE 6. VENDOR PART SELECTION INTERFACE

Output Inductance

DESIGN CRITERIA: L_{ir}^2 [30] %
Fsw [500k] Hz

Select an Inductor

Use Recommended
Inductance 24.57uH
IPeak 690.0mA

Use Vendor Part
Part Lookup
PCA20EFD-U03S003
Inductance 22.30uH
DCR 47.50mΩ
IRating 1.600A

Use Your Own
Inductance [24.57u] H
IPeak 690.0mA

Continue

FIGURE 7. PART SELECTION INTERFACE

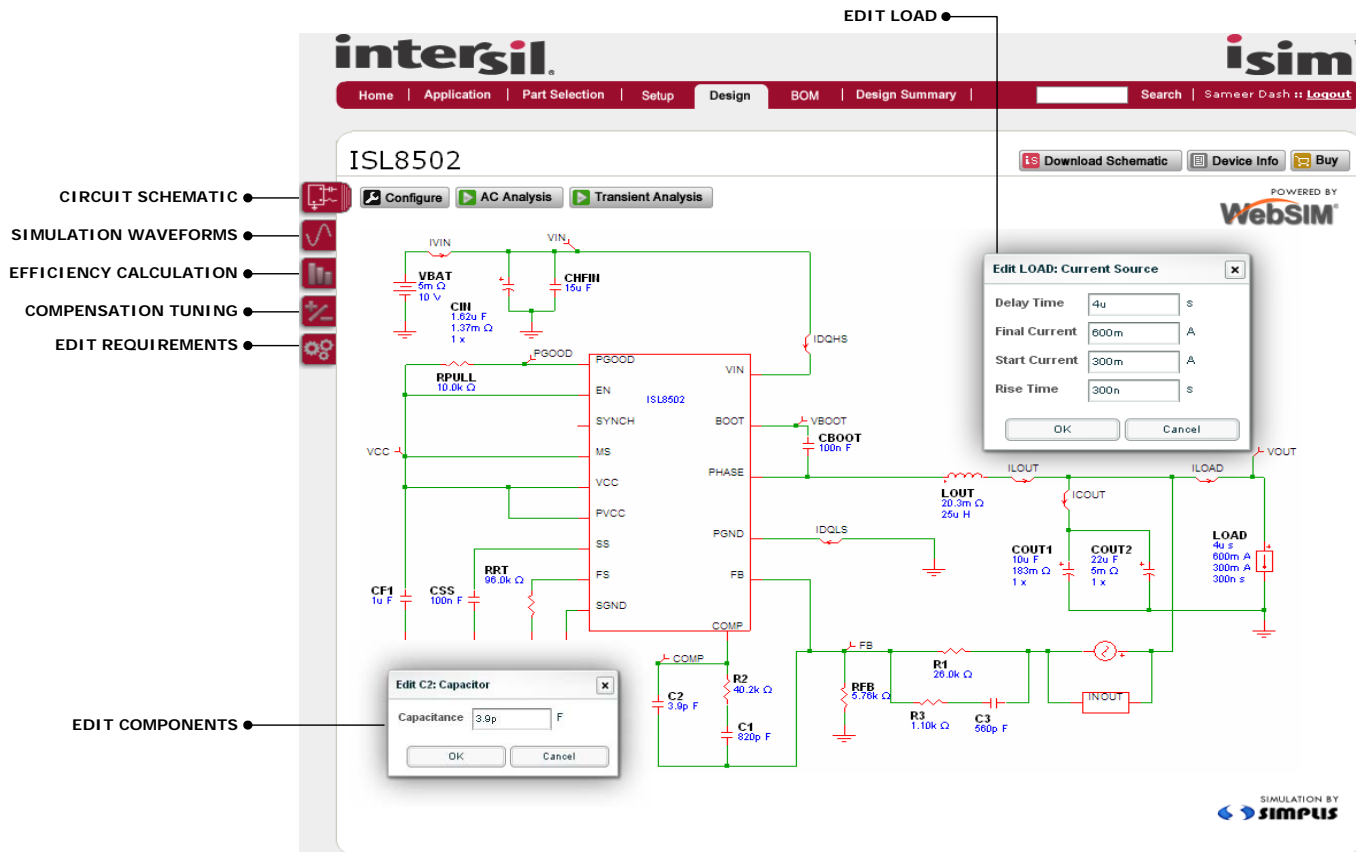



FIGURE 8. ISL8502 iSim v3 DESIGN PAGE

Analysis and Optimization

The next stage in the process is the Design Page. This includes advanced new features for editing the application schematic, performing AC and Transient Analysis, Efficiency Calculations, Compensation tuning, and editing input and output requirements - all in one simple and easy-to-use interface. Figure 8 illustrates the Design Page for the ISL8502 as an example.

Transient Analysis

The Transient Analysis can be used to analyze the circuit's behavior in response to an output load step. The **Configure** button is used to set the Simulation Stop Time and the LOAD can be clicked to set the Delay time, Final Current, Start Current and Rise Time of the LOAD, as shown in Figure 8.

Once the settings are configured, click the **Transient Analysis** button to start the simulation. Resulting waveforms can be viewed by clicking the  tab on the left. Figure 9 shows the ISL8502 transient response to the 300mA load step.

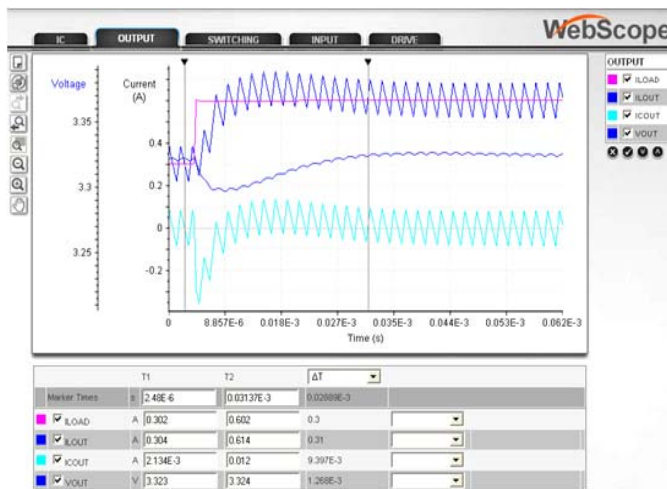


FIGURE 9. TRANSIENT ANALYSIS RESULTS

AC Analysis

The AC Analysis can be used to view the bode plot of the small signal response of the circuit in the frequency domain. The **Configure** button can be used to set the start and stop frequency of the AC Analysis.


Once the settings are configured, click the **AC Analysis** button to start the simulation. Similar to Transient Analysis, the resulting waveforms can be viewed by clicking the  tab on the left.

Figure 10 shows the ISL8502 AC response and also indicates the Phase Margin and Crossover Frequency.

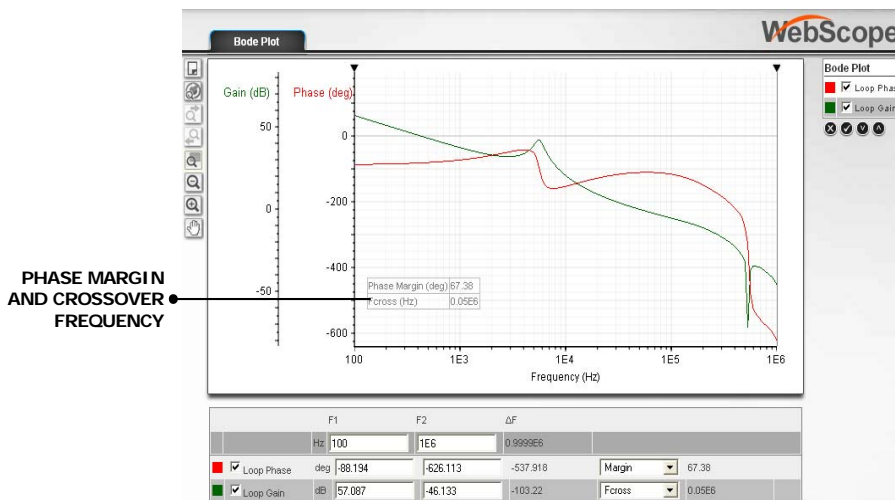
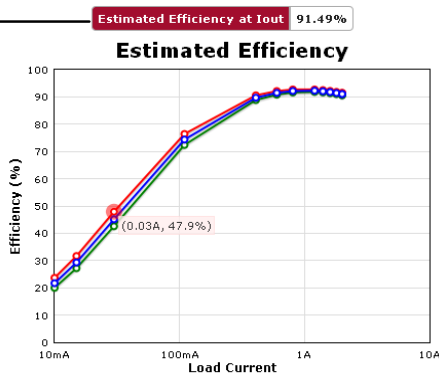
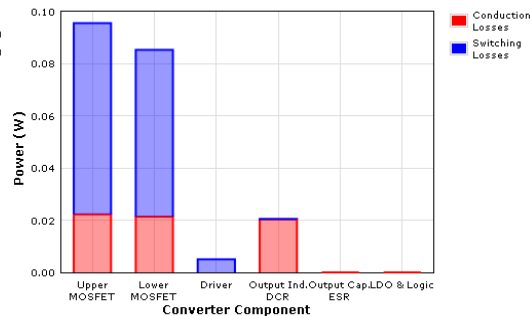


FIGURE 10. AC ANALYSIS RESULTS

ESTIMATED EFFICIENCY AT I_{OUT}



Power Loss Distribution




The settings here will affect the efficiency of the device. As you update the values you will see the changes reflected in the efficiency and power loss graphs. When you are satisfied with the results, click on 'Apply to Schematic' to apply the values and view the schematic.

EDIT COMPONENTS

L _{OUT}		C _{OUT1}		Switching Frequency	
L _{OUT} , DCR	20.3m Ω	C _{OUT1} , CC	10u F	F _{SW}	1.00MegHz
L _{OUT} , LI	25u H	C _{OUT1} , ESR	183m Ω		
		C _{OUT1} , QUANTITY	5.00 x		

FIGURE 11. EFFICIENCY CALCULATION WORKSHEET

Efficiency/Power Loss Distribution

iSim v3 enables the user to estimate the efficiency of their design. The user may click on the  tab on the left to view the efficiency calculation worksheet, as shown in Figure 11.

The tool also enables the user to study Power Loss across the primary components of the circuit and also displays conduction losses and power losses separately. In addition, the user also has the flexibility to modify circuit parameters such as switching frequency, output inductor and capacitor, and view the change in efficiency and power loss graphs.

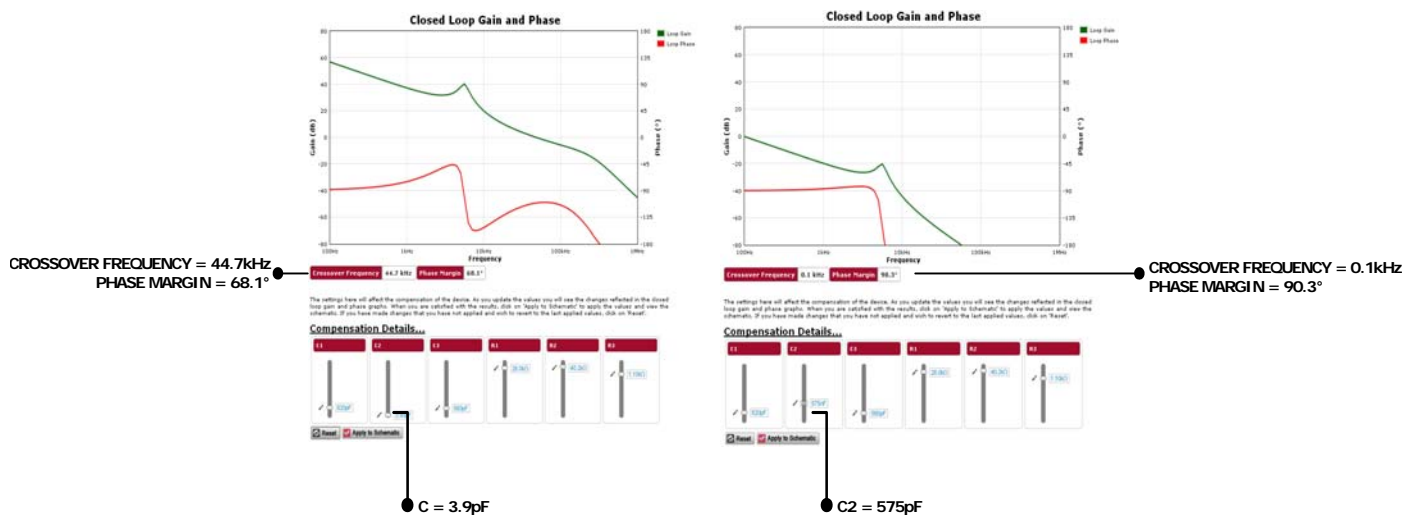



FIGURE 12. COMPENSATION TUNING EXAMPLE

Compensation Tuning

The compensation tuning feature on iSim v3 allows the user to change the values of compensation components and also view the change in the bode plot to achieve the desired gain and bandwidth for the system. To tune the compensation components, click on the  tab on the left.




The slide bars allow the user to intuitively change the values of the components and then apply them to the schematic using the  button.

Figure 12 illustrates how a change in the value of a compensation component (C2 in this case) results in a change in bandwidth and phase margin.

Editing Input, Output Requirements

If the user wishes to change the input and output requirements for voltage and current, this can be done using the  tab on the left, as shown in Figure 13. Clicking  re-starts the design with the new requirement specifications.

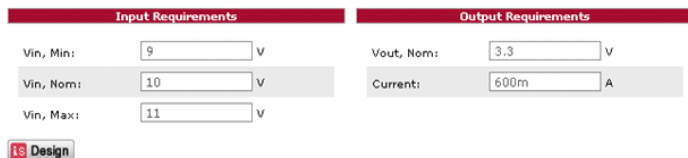







FIGURE 13. RE-DESIGN OPTION

Design Reports Generation

Once the user has completed the design, iSim v3 offers the convenient option to download the following items:


1. **BOM:** The tool allows the user to view a Bill of Materials reflecting the design schematic developed by the user, with actual Manufacturer and Vendor Part Numbers from Digikey as shown in Figure 14. It also provides pricing information and the option to

order these parts using the  button. The Bill of Materials can be viewed using the  tab on the top. The user may download the BOM in Microsoft Excel format using the  button under the **Design Summary** tab on the top.

2. **Design Summary:** The user may also download a summary of the entire design including Input, Output requirements, Schematic and Bill of Materials using the  button under the **Design Summary** tab on the top.
3. **Schematic for iSim PE:** After using iSim to design the schematic, the user can download the offline iSim:PE version of the schematic, using the  button, to edit schematics, add or delete components, view waveforms and perform application analysis on their desktop. iSim:PE is a complete offline tool and is powered by the Simplis/Simatrix simulator.

Conclusion

iSim v3 is the new version of Intersil's iSim tool and is designed specifically for Integrated FET parts. The tool implements several new features to help designers quickly select the best components and then simulate and optimize their design. New features in iSim v3 include efficiency graphs, power loss distribution, bill of material generation, and dynamic tuning for compensating closed loop response. The application note illustrates these features using examples to serve as a quick manual for designers and prepare them to quickly evaluate and generate an actual credible design based on the customer's requirements.

BOM Powered By 

CHECKOUT x 100 Boards Price Break: 100

Ref	Qty	Digi-Key Part Number	Manufacturer Part Number	Manufacturer	Description	#	\$
U1	1	ISL8502IRZ-TCT-ND	ISL8502	Intersil	IC REG SYNC BUCK 2.5A 24QFN	#	5.37000
C1	1	04023C821KA72A-ND	04023C821KA72A	AVX Corporation	CAP CER 820PF 25V X7R 0402	DK #	0.57800
C2	1	02012A4R7CAQ2A-ND	02012A4R7CAQ2A	AVX Corporation	CAP CER 4.7PF 10V NP0 0201	DK #	0.07900
C3	1	04025C561JAT2A-ND	04025C561JAT2A	AVX Corporation	CAP CER 560PF 50V X7R 0402	DK #	0.06700
CB-OUT	1	0306ZD104KAT2A-ND	0306ZD104KAT2A	AVX Corporation	CAP CER .10UF 10V X5R 0306	DK #	0.42875
CF1	1	0508ZC105MAT9A-ND	0508ZC105MAT9A	AVX Corporation	CAP CER 1.0UF 10V X7R 0508	DK #	0.71750
CHFIN	1	490-1945-1-ND	GRM55ER71E156KA01L	Murata Electronics North America	CAP CER 15UF 25V 10% X7R 2220	DK #	5.30200
CIN	1	478-1658-1-ND	TAJA155K020RNJ	AVX Corporation	CAP TANTALUM 1.5UF 20V 10% SMD	DK #	0.35000
COUT1	1	478-1762-1-ND	TPSC106K025R0500	AVX Corporation	CAP TANT LOWESR 10UF 25V 10% SMD	DK #	0.88000
COUT2	1	12106Z226KAT2A-ND	12106Z226KAT2A	AVX Corporation	CAP CER 22UF 6.3V 10% X75 1210	DK #	0.80500
CSS	1	02014D104KAT2A-ND	02014D104KAT2A	AVX Corporation	CAP CER .10UF 4V 10% X5R 0201	DK #	0.10500
LOUT	1	445-1028-1-ND	MLF1608C180K	TDK Corporation	INDUCTOR MULTILAYER 18UH 1608	DK #	0.41000
R1	1	14.3KXTR-ND	MFR-25FRF-14K3	Yageo	RES 14.3KOHM 1/4W 1% METFLM T/R	DK #	0.02138
R2	1	311-35.7KCRTR-ND	RC0805FR-0735K7L	Yageo	RES 35.7K OHM 1/8W 1% 0805 SMD	DK #	0.00420
R3	1	2312-396-71152-ND	MCA12060D11518P500	Vishay/BC Components	RES 1.15K OHM 1/8W .1% SMD 1206	DK #	0.34800
RFB	1	311-5.76KFRDKR-ND	RC1206FR-075K76L	Yageo	RES 5.76K OHM 1/4W 1% 1206 SMD	DK #	0.08200
RPULL	1	10.0KAVTB-ND	EMP300TFE73-10K	Yageo	RES MET FILM 10K OHM 3W 1% AX	DK #	0.07400
RRT	1	100K8FTB-ND	HHV-50JT-52-100K	Yageo	RES MET FILM 100K OHM 1/2W 5% AX	DK #	0.11300

FIGURE 14. BILL OF MATERIALS PAGE

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852-2886-9022

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338