

Intersil HSP43220 Decimating Digital Filter Development Software

Intersil DECIMATE Development Software assists the design engineer to prototype designs for the Intersil HSP43220 Decimating Digital filter (DDF). Developed specifically for the DDF, this software consists of three integrated modules: DDF Design, DDF Simulator and DDF PROM. The Design module designs a filter from a set of user specifications for the DDF. The Simulator module models the DDF's internal operation. The PROM module uses the device configuration created by the Design module to build a PROM data file that can be used to store and download the DDF configuration.

DDF System Design

The DDF consists of two stages: a High Decimation Filter (HDF) and a Finite Impulse Response (FIR) filter. Together these provide a unique narrow band, low pass filter. Because of this unique architecture, special software is required to configure the device for a given set of filter parameters. This software uses system level filter parameters (listed below) to perform the trade off analysis and calculate the values for the DDF's Configuration Registers and FIR coefficients.

Design specifications are supplied by the user in terms of:

1. Input sample frequency.
2. Required output sample frequency.
3. Passband signal bandwidth.
4. Transition bandwidth.
5. Amount of attenuation allowed in the passband.
6. Amount of stopband attenuation required for signals outside of the band of interest.

This information is entered into a menu screen (See Figure 1), providing immediate feedback on the design validity. The design module calculates the order of the HDF, HDF decimation required, the FIR input data rate, minimum clock frequency for the FIR, FIR order and decimation required in the FIR.

The design module will then generate the FIR filter. Four different methods are provided for the FIR design:

1. A Standard FIR automatically designed by the module using the Parks-McClellan method to compute the coefficients of an equiripple (Chebyshev) filter.
2. Any FIR imported into the Design module from another FIR design program.
3. A precompensated FIR which is automatically designed by the module to compensate for the roll-off in the passband of the HDF frequency response.

4. The FIR may also be bypassed in which case the optimal HDF is designed from the user specifications.

Frequency response curves are then displayed showing the resulting responses in the HDF, FIR and for the entire chip using the given filter design. Figure 2 is a typical display. The user may save this frequency response data for further analysis. The design module also creates a report file documenting the filter design and providing the coefficients and setup register values for programming the device.

DDF Simulator

The simulator provides an accurate simulation of the device before any hardware is built. It can be used to simulate any filter designed with DECIMATE. The simulator takes into account the fixed point bus widths and pipeline delays for every element in the DDF.

The simulator provides the user with an input signal which can be used to stimulate the filter. This signal is created from the options shown in Table 1. The user can select a pure step, impulse, cosine, chirp, uniform or Gaussian noise as the input signal, or a more complex signal can be generated by combining that data with an option selected from the Signal #2 column, with the combining operator chosen from the middle column. The user can also import a signal from an outside source.

TABLE 1.

SIGNAL #1	OPERATION	SIGNAL #2
Step		Step
Impulse	No Operation	Impulse
COSINE	Add	COSINE
Chirp	Concatenate	Chirp
Uniform Noise	Multiply	Uniform Noise
Gaussian Noise		Gaussian Noise
Imported From Outside		

Probes are provided to select specific areas to graphically display data values, as well as save into data files for further processing. The DDF Simulator has two levels; the DDF Simulator Specification Screen and the DDF Simulator Main Screen.

The Specification Screen (see Figure 3) is used to input the simulation parameters. The user selects display modes in either continuous or decimated format and data formats in either decimal or hexadecimal. The Specification Screen also provides for selection of the input signal.

The simulator main screen (see Figure 4) defines the simulator test probes and displays the data values per clock

DECIMATE

cycle. The interactive simulator screen consists of the HSP43220 Block Diagram, test probes and register contents. The user selects the step size of the input sample clock and also selects the probes to be monitored. The simulator will then clock through the specified number of clock cycles and display the resulting time domain response. Figure 5 shows a typical probe display.

Monarch 2.0 DSP Design Software

DECIMATE is fully integrated with Monarch 2.0 professional DSP design software. Monarch is a full featured DSP package with FIR IIR filter design and analysis, two dimensional and three dimensional viewing, a programmable signal/systems laboratory with 100 + DSP/Math functions, extensive fixed-point support and

FFTs/IFETs Monarch is available separately from The Athena Group, Inc.

When used with Monarch 2.0, DECIMATE becomes a full feature design environment for a DSP system. Data can easily be transferred from DECIMATE modules to the Monarch modules for further analysis.

System Requirements

IBM PC™, XT™, AT™, PS/2 computer or 100% compatible with 640K RAM running MS/PC-DOS 2.0 or higher One MegaByte of fixed-disk space with 5.25" or 3.5" floppy drive. CGA, MCGA, EGA, VGA, 8514, or Hercules Graphics Adapter. A Math coprocessor is strongly recommended.



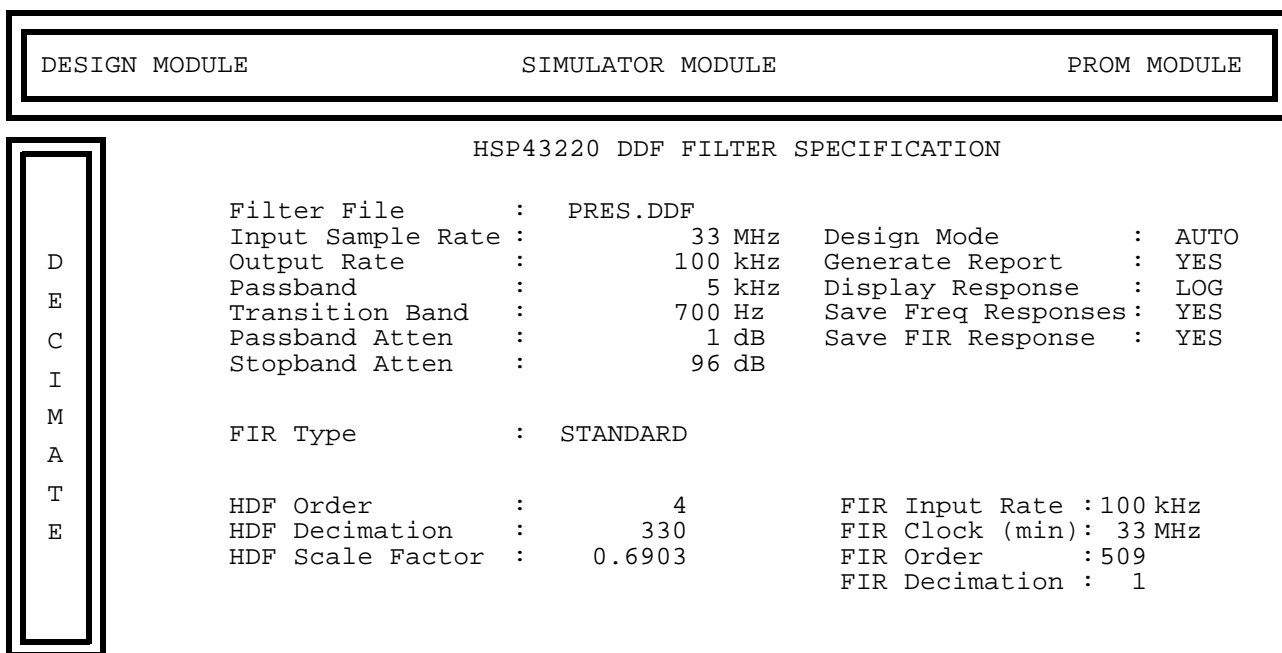


FIGURE 1. FILTER SPECIFICATION MENU

HDF Frequency Response

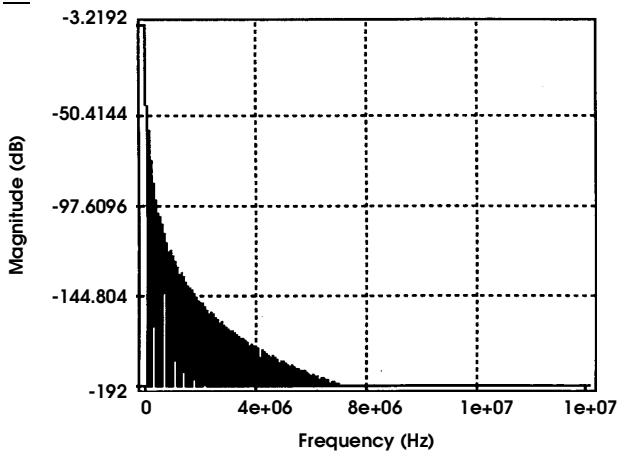

FIR Frequency Response

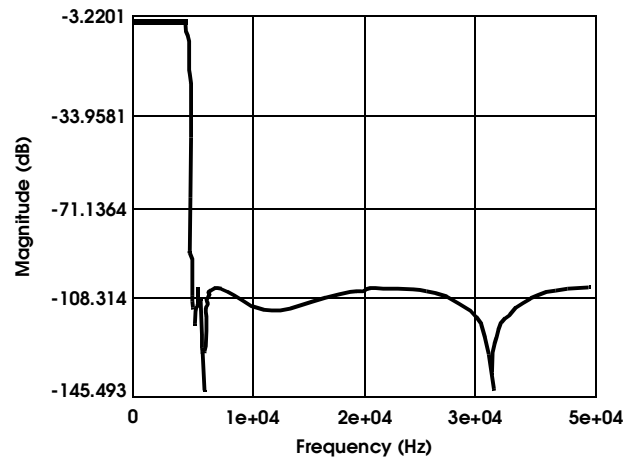

System Frequency Response


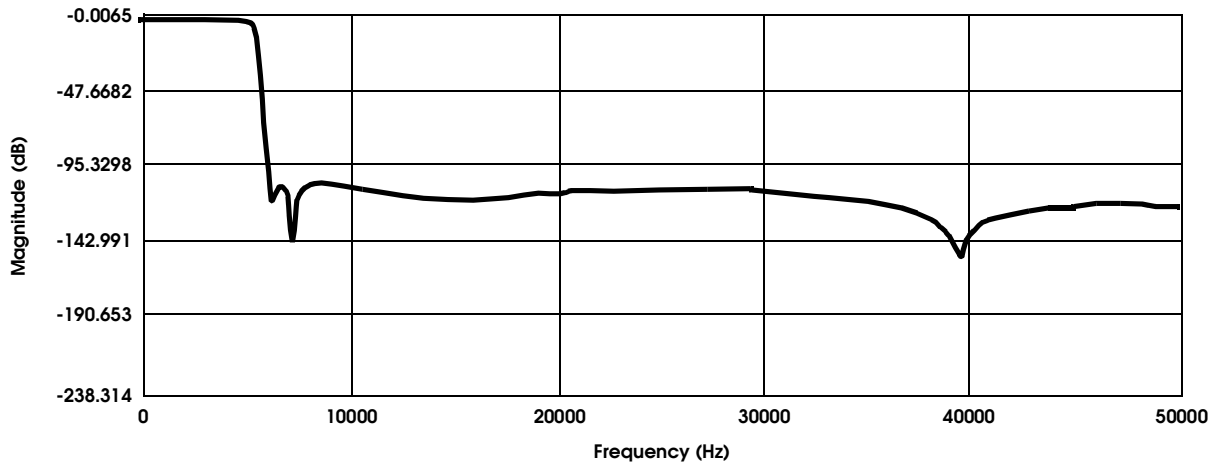


FIGURE 2. FREQUENCY DISPLAY

DECIMATE

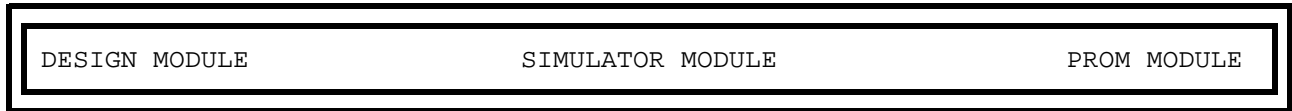

D
E
C
I
M
A
T
E

HSP43220 DDF FILTER SPECIFICATION

```

Filter File       :      PRES.DAR
Probe Display    :      HEX
Save Cont. Output :      YES          Input Rate : 33 MHz
Display Mode     :      CONTINUOUS   Output Rate : 100 kHz
            
```

INPUT SIGNAL SPECIFICATION

```

Signal Origin :      GENERATED


Signal #1     :      COSINE          Amplitude Frequency Phase
                :      1.00          5 kHz      0.00
Operator      :      +              Mean      StdDev
Signal #2     :      GAUSS           0.00      0.500000
            
```

FIGURE 3. SPECIFICATION MENU

DESIGN	VIEW	ANALYSIS	ENHANCEMENTS	CONFIG	OSSHELL
--------	------	----------	--------------	--------	---------

HSP43220 DDF SIMULATOR - MAIN

DDFDES
 DDFSIM
 DDFPROM

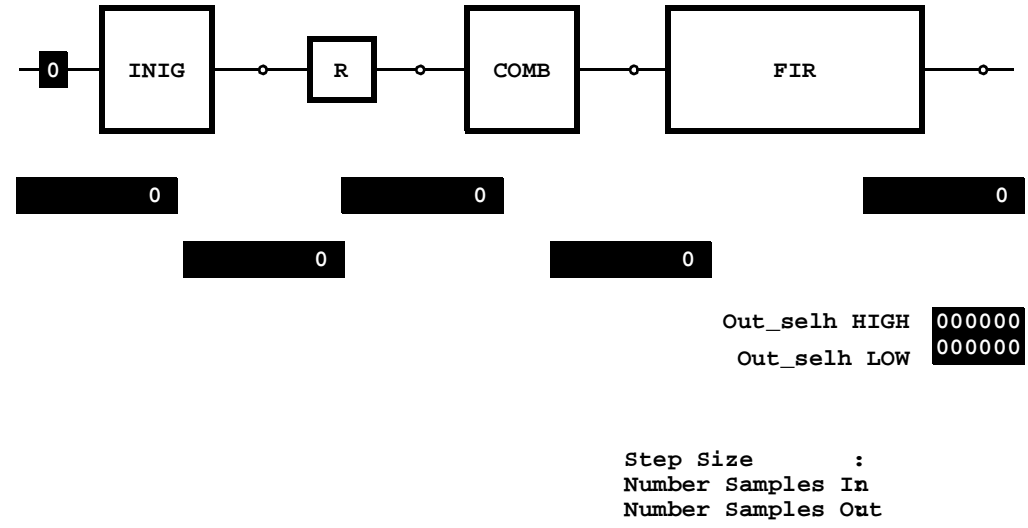

```

Out_selh HIGH  000000
Out_selh LOW   000000

Step Size      :      1
Number Samples In      0
Number Samples Out     0
            
```

FIGURE 4. SIMULATOR - MAIN MENU

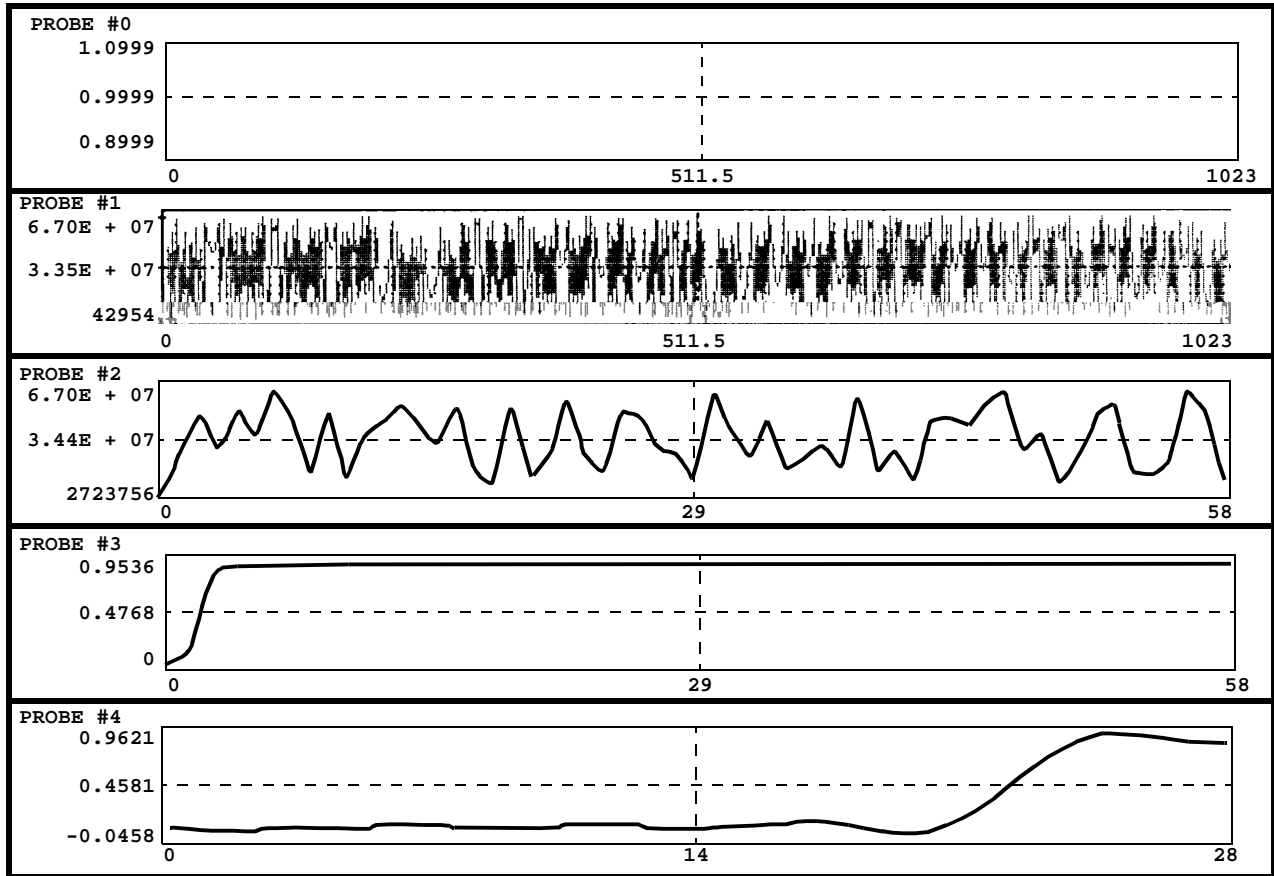


FIGURE 5. SIMULATOR PROBE DISPLAY

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems. Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com

Sales Office Headquarters

NORTH AMERICA
 Intersil Corporation
 7585 Irvine Center Drive
 Suite 100
 Irvine, CA 92618
 TEL: (949) 341-7000
 FAX: (949) 341-7123

Intersil Corporation
 2401 Palm Bay Rd.
 Palm Bay, FL 32905
 TEL: (321) 724-7000
 FAX: (321) 724-7946

EUROPE
 Intersil Europe Sarl
 Ave. William Grasse, 3
 1006 Lausanne
 Switzerland
 TEL: +41 21 6140560
 FAX: +41 21 6140579

ASIA
 Intersil Corporation
 Unit 1804 18/F Guangdong Water Building
 83 Austin Road
 TST, Kowloon Hong Kong
 TEL: +852 2723 6339
 FAX: +852 2730 1433